


# RAFTERLINK

Side Mounted Timber Rafter Anchor

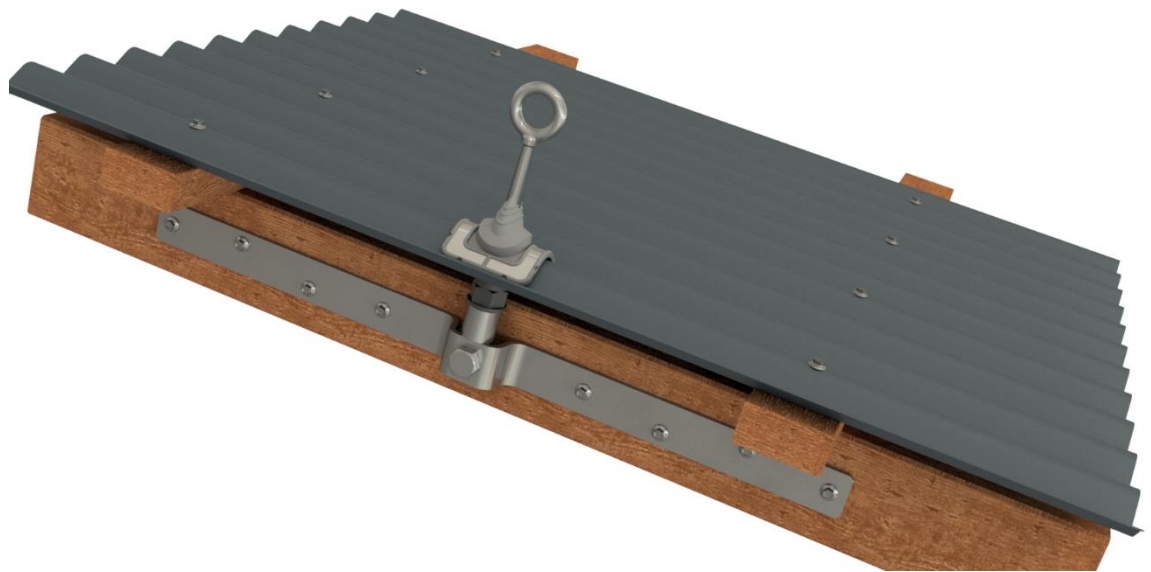

- The RafterLink complete unit includes SafetyLink's patented Eye-bolt. The length of the eye-bolt enables to protrude above the roof structure when installing into timber structures.
- **Standard Eye-bolt** is designed for **fall arrest**, it's long tapered stem is designed to absorb energy while arresting a fall therefore reducing the load off the structure and the person attached to the anchor.

#### WHAT AM I USED FOR?

An anchor point designed for use on timber structures where there is easy access to the underside of the roof. Installs onto the side of the rafter.

#### STANDARDS

Complies with AS/NZS 1891.4.

COMPLETE UNIT - PRODUCT CODE: RAFTR004			Weight: 1.682kg
Product Parts	Description	Qty	Material
WASHER 75mm Square	Rubber Hat Washer 75mm	1	Rubber
RAFTER-BASE-SIDE	RafterLink with adapter	1	316 Stainless Steel
EYEBOLT-STANDARD	Standard Eye-bolt (Bearing Length 178mm)	1	316 Stainless Steel
NUT LOCKING HEX	M16 Locking Hex Nut	1	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@safetylink.com](mailto:ip@safetylink.com) and quote the product code.

Doc ID: MKT-72 Version: 16.0

Asia-Pacific/The Americas  
[info@safetylink.com](mailto:info@safetylink.com)

Europe/Africa/Middle East  
[europe.sales@safetylink.com](mailto:europe.sales@safetylink.com)

Northern Europe  
[uk.sales@safetylink.com](mailto:uk.sales@safetylink.com)



SCAN ME

[www.safetylink.com](http://www.safetylink.com)



SCAN ME

Catalogue



SCAN ME

Anchor Layout Video



SCAN ME

Safety Centre  
Training

DATA SHEET



FS 707792