



SafetyLink®

Innovative
Fall Protection



Terms and
Conditions



Website



Installation
Handbook




Catalogue

DATA SHEET

PERMANENT LADDERS

Extended Ladder Brackets

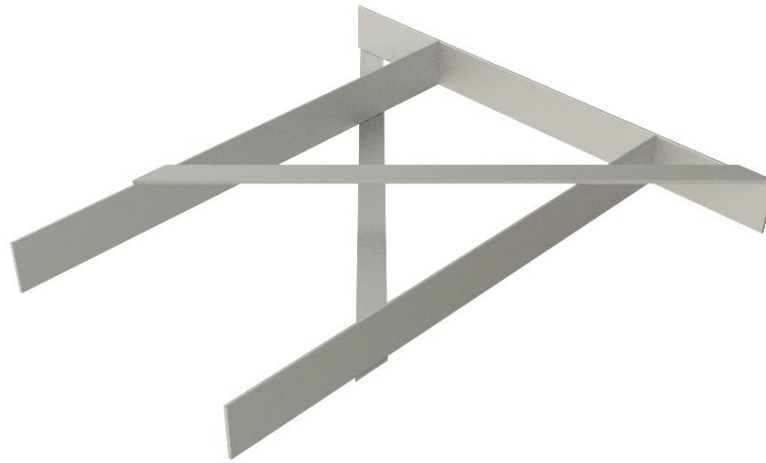

- Extended brackets to be used when extending over large gutters and eaves.
- Bracket can be cut to fit required length.
- Heavy gauge aluminium for superior strength.

STANDARDS

SafetyLink ladders are manufactured to AS 1657 Standards.

Assembling the SafetyLink® Permanent Ladder System is a simple exercise with SafetyLink's comprehensive installation guides. The individual ladder pieces join together with an outer coupling channel that is placed over the top of the inner channel and pop riveted into place.

A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT

Product Code	Description	Weight (kg)	Material
LADER001.04.2	Extended Ladder Bracket: 500mm	2.20	Marine Grade Aluminium
LADER001.04.3	Extended Ladder Bracket: 800mm	4.10	Marine Grade Aluminium

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-112 Version: 4.0



IS 707792