



SAFETYLINK ROOF WORKERS KIT

Product Code: ROOFKIT_SL

- ⚠ **WARNING: READ CAREFULLY SOMEONE'S LIFE DEPENDS ON IT.**
- ⚠ **READ ENTIRE INSTRUCTIONS BEFORE USING ANY SAFETYLINK PRODUCT.**

SafetyLink's Roof Workers Kit components:

- 1 x SafetyLink Full Body Harness
- 1 x SafetyLink 20m Adjustable Rope Line with Energy Absorber
- 1 x SafetyLink Anchor Strap
- 2 x SafetyLink Karabiners
- 1 x SafetyLink Gear Bag



Users must be trained and competent in the use of personal protection equipment for working at heights and consult AS/NZS 1891.4 regarding selection, use and maintenance. A risk assessment and rescue plan must be completed prior to undertaking any tasks requiring the use of this equipment.

PRODUCT CONSTRAINTS AND LIMITATIONS

All roof kit components must only be used with systems and equipment that meet the requirements of AS/NZS 1891.1, 1891.3 and 1891.4.

Adjustable rope lines are designed for single users up to 140kg only and **must not** be used to form horizontal lifeline systems.

Roof kit components are designed and intended for personal height safety use and must not be used to lift or restrain equipment and materials.

SafetyLink recommends that adjustable life lines be used in a manner that ensures the user is always in Fall Restraint (under tension/no slack in the rope line) When this is not possible the user will be working in Fall Arrest (limited slack in the rope line). The user must ensure the minimum amount of rope line slack is present and must continually assess and adjust ropes and anchor attachment points to ensure that the maximum possible free-fall remains **under two (2) metres**.



GENERAL INSTRUCTIONS AND WARNINGS

SAFETYLINK ROOF WORKERS KIT

The harness must be correctly fitted to the user (refer fitting the harness) and used only as intended with secure attachment being made to the marked fall arrest attachment points on the harness only. Making alterations or additions to the harness not intended or agreed to by the manufacturer may result in serious injury or death.

When using the harness with a lanyard or adjustable rope line ensure that a tear web energy absorber is always used and correctly connected directly to the rear dorsal point or front fall arrest point on the harness only.

When connecting with a lanyard or adjustable rope line to an anchorage point ensure the anchor point is designed to support a minimum load of 15kN. Only tested, compliant and certified anchor points should be used.

When making any connection to an attachment point on a harness which cannot be seen by the wearer of the harness, either the connection should be made before putting the harness on, or the connection should be made or checked for security by a second person.

When securing the harness via a lanyard to an anchorage point the connection should be at a level which will result in the minimum free-fall and the least total fall distance consistent with the wearer's ability to carry out work tasks.

NEVER - Clip rope lines back on each other, always clip directly to anchor points or harness attachment points only.

NEVER - Tie additional knots in rope lines. This can result in obstructions, weakening or serious injury due to increased fall distances.

NEVER - Allow rope lines to be used near, over and around unprotected sharp edges. This can result in rope damage and equipment failure.

Karabiners must be visually and physically checked as in the locked position after each connection.

Adjustable rope lines must be constantly assessed and adjusted by the user when in use to ensure minimal slack rope is present in the system. This is completed by depressing the rope adjuster's cam into the open position and extending or reducing rope through the rope adjuster by hand.

The rope adjuster will automatically lock onto the rope line once the user has released the locking cam. Always ensure the rope adjuster's cam is only in the open position long enough to make these adjustments. Never work with the rope adjuster's cam in a constant open state.

Anchor Slings are to be used to create anchor points when no others are present. The anchor sling can be wrap around suitable structure and connected to with the adjustable rope line system. These structures must be assessed by a competent person as suitable of supporting 15kN and being located appropriately for the task at hand.


STEP 1.

Hold the harness by the dorsal (rear) attachment point.

Ensure all harness straps are untangled.

Check that leg and chest strap buckles are undone/unbuckled.


Shoulder strap buckles should be loosened off.

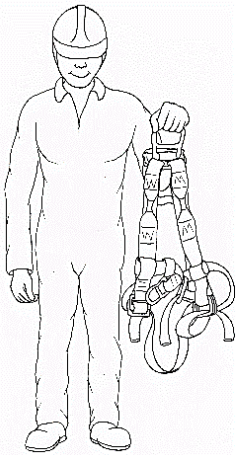

STEP 2.


Fit the harness by passing arms through the shoulder straps one at a time, like putting on a jacket.

Ensure shoulder straps are not twisted and are sitting flat.

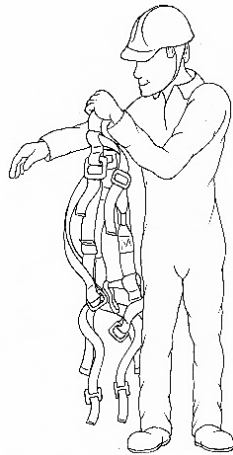

STEP 3.


Connect the chest strap buckle and lightly tension.

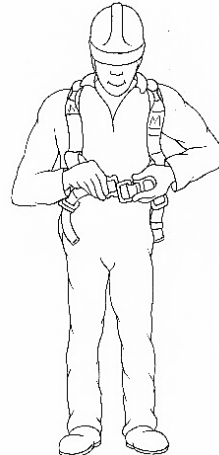

STEP 4.

Adjust the shoulder straps to the correct height by tensioning them down.

Check that the dorsal attachment point is now correctly located centrally between the shoulder blades.

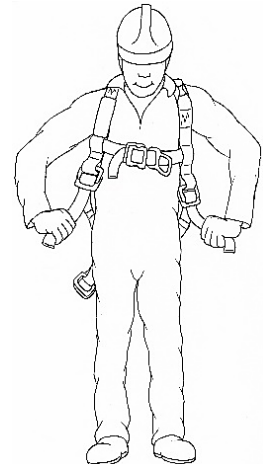

STEP 5.

Connect and adjust leg straps by passing through your legs and into each buckle.

Ensure leg strap are not twisted and are sitting flat.



STEP 6.

Adjust each leg strap to achieve a snug comfortable fit.


The user should be able to fit a flat hand between their leg and strap but not make a fist.



STEP 7.

Check all harness buckles and straps to ensure correct tensions.


Your harness needs to be snug and should not restrict physical movement.

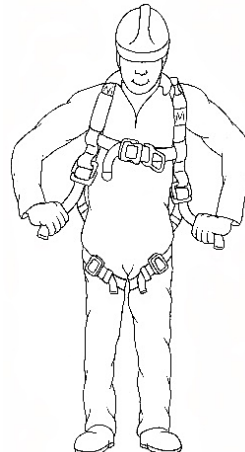

STEP 8.

All loose strap ends must be secured with the elastic retainers to prevent entanglement.

When standing upright, the harness should be firmly fitted and comfortable without undue pressure on chest, shoulder or pelvic areas.

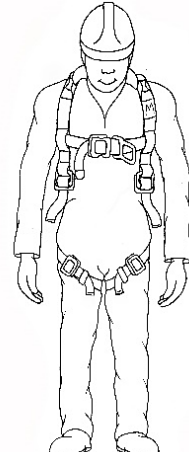



REGULAR INSPECTION PROCEDURES

This equipment must be inspected before and after each use and deemed appropriate and safe for designated work tasks by a competent person. Additionally, inspections must be completed and recorded no less than **every 6 months** by a competent person. It is recommended that this record be kept with the equipment for ease of reference.

Inspections should include but not be limited to checks for signs of:

INSPECTION CHECKLIST	
Check for signs of:	
ID LABELLING:	Secure/Clear/Current
	Unmodified
METAL HARDWARE CHECKS:	Excessive Wear
	Corrosion / Rust
	Incorrect Orientation
	Incorrect Movement/Locking
	Cracks / Deformation
	Damaged Load Rating Marks
	Correct Spring Return Action
WEBBING / ROPE DAMAGE:	Cuts / Tears / Abrasion
	Stitching Damage
	Excessive Wear / Thin
	Heat / Glazing / Hardening
	Chemical Exposure/UV Damage
	Stretched/Shrinkage
	Deployed tear web energy absorber
PLASTICS / COVERS / THIMBLES:	UV Damage / Fade
	Cracks / Chips

If defects are noticed or damage is suspected the harness must immediately be removed from service.

CARE AND REMOVAL FROM SERVICE:

- Store in a cool, dry, place away from direct sunlight. The environment should be chemically neutral away from excessive heat or heat sources, high humidity, sharp edges, corrosives or other possible causes of damage.
- If any part of an assembly is to be exposed to chemicals, eg. Cleaning materials or hazardous atmospheres, the user should consult SafetyLink to determine whether the part is suitable for continued use.
- Do not store wet/soiled or exposed to UV light.
- If soiled, rinse in clean water of domestic supply quality (maximum temperature forty (40) degrees) with mild neutral detergent. Dry naturally away from dry heat and direct sunlight. Do not tumble dry.
- AS/NZS 1819.1 recommends the maximum safe service life of this equipment to be ten (10) years from manufacture date, providing damage has not occurred prior due to use or incorrect storage.
- **Regular inspection and care of your equipment is of the utmost importance.**
- The harness and rope line should be destroyed or returned to the manufacturer for inspection if a fall has been sustained or damage has occurred.
- Personal energy absorbers that absorb energy by permanent deformation or destructive action must be removed from service and discarded once that process has commenced.



FALL PROTECTION EQUIPMENT LOG

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights.

All items of personal protection equipment to be inspected by a competent person.

- Australian standards recommend a complete logged inspection every six (6) months.
- Inspections to be completed in conjunction with inspection checklist.

SAFETYLINK ROOF WORKERS KIT

HARNES017		SafetyLink HARNESS			SERIAL NO:		
D.O.M:		EXPIRY DATE:			ID NO:		
Service	Date	Comments/Notes			Fit for Service	Removed from Service	Inspected by
6 months					Yes / No	Yes / No	
1 year					Yes / No	Yes / No	
1.5 years					Yes / No	Yes / No	
2 years					Yes / No	Yes / No	
2.5 years					Yes / No	Yes / No	
3 years					Yes / No	Yes / No	
3.5 years					Yes / No	Yes / No	
4 years					Yes / No	Yes / No	
4.5 years					Yes / No	Yes / No	
5 years					Yes / No	Yes / No	
5.5 years					Yes / No	Yes / No	
6 years					Yes / No	Yes / No	
6.5 years					Yes / No	Yes / No	
7 years					Yes / No	Yes / No	
7.5 years					Yes / No	Yes / No	
8 years					Yes / No	Yes / No	
8.5 years					Yes / No	Yes / No	
9 years					Yes / No	Yes / No	
9.5 years					Yes / No	Yes / No	
10 years					Yes / No	Yes / No	

⚠ HARNESSES MUST BE INSPECTED AS SAFE EVERY TIME BEFORE USE AND AFTER EACH USE.

⚠ SIX MONTHLY LOGGED SAFETY INSPECTIONS ARE TO BE COMPLETED BY A COMPETENT PERSON. (REFER TO HARNESS CARE/MAINTENANCE INSTRUCTIONS)



FALL PROTECTION EQUIPMENT LOG

ASTRAP003		SafetyLink Anchor Strap		SERIAL NO:	
D.O.M:		EXPIRY DATE:		ID NO:	
Service	Date	Comments/Notes	Fit for Service	Removed from Service	Inspected by
6 months			Yes / No	Yes / No	
1 year			Yes / No	Yes / No	
1.5 years			Yes / No	Yes / No	
2 years			Yes / No	Yes / No	
2.5 years			Yes / No	Yes / No	
3 years			Yes / No	Yes / No	
3.5 years			Yes / No	Yes / No	
4 years			Yes / No	Yes / No	
4.5 years			Yes / No	Yes / No	
5 years			Yes / No	Yes / No	
5.5 years			Yes / No	Yes / No	
6 years			Yes / No	Yes / No	
6.5 years			Yes / No	Yes / No	
7 years			Yes / No	Yes / No	
7.5 years			Yes / No	Yes / No	
8 years			Yes / No	Yes / No	
8.5 years			Yes / No	Yes / No	
9 years			Yes / No	Yes / No	
9.5 years			Yes / No	Yes / No	
10 years			Yes / No	Yes / No	

ROPELN013		20m Adjustable Rope Line with Energy Absorber		SERIAL NO:	
D.O.M:		EXPIRY DATE:		ID NO:	
Service	Date	Comments/Notes	Fit for Service	Removed from Service	Inspected by
6 months			Yes / No	Yes / No	
1 year			Yes / No	Yes / No	
1.5 years			Yes / No	Yes / No	
2 years			Yes / No	Yes / No	
2.5 years			Yes / No	Yes / No	
3 years			Yes / No	Yes / No	
3.5 years			Yes / No	Yes / No	
4 years			Yes / No	Yes / No	
4.5 years			Yes / No	Yes / No	
5 years			Yes / No	Yes / No	
5.5 years			Yes / No	Yes / No	
6 years			Yes / No	Yes / No	
6.5 years			Yes / No	Yes / No	
7 years			Yes / No	Yes / No	
7.5 years			Yes / No	Yes / No	
8 years			Yes / No	Yes / No	
8.5 years			Yes / No	Yes / No	
9 years			Yes / No	Yes / No	
9.5 years			Yes / No	Yes / No	
10 years			Yes / No	Yes / No	



FALL PROTECTION EQUIPMENT LOG

KARBNR022		SafetyLink Karabiner 1			SERIAL NO:		
D.O.M:		EXPIRY DATE:			ID NO:		
Service	Date	Comments/Notes			Fit for Service	Removed from Service	Inspected by
6 months					Yes / No	Yes / No	
1 year					Yes / No	Yes / No	
1.5 years					Yes / No	Yes / No	
2 years					Yes / No	Yes / No	
2.5 years					Yes / No	Yes / No	
3 years					Yes / No	Yes / No	
3.5 years					Yes / No	Yes / No	
4 years					Yes / No	Yes / No	
4.5 years					Yes / No	Yes / No	
5 years					Yes / No	Yes / No	
5.5 years					Yes / No	Yes / No	
6 years					Yes / No	Yes / No	
6.5 years					Yes / No	Yes / No	
7 years					Yes / No	Yes / No	
7.5 years					Yes / No	Yes / No	
8 years					Yes / No	Yes / No	
8.5 years					Yes / No	Yes / No	
9 years					Yes / No	Yes / No	
9.5 years					Yes / No	Yes / No	
10 years					Yes / No	Yes / No	

KARBNR022		SafetyLink Karabiner 2			SERIAL NO:		
D.O.M:		EXPIRY DATE:			ID NO:		
Service	Date	Comments/Notes			Fit for Service	Removed from Service	Inspected by
6 months					Yes / No	Yes / No	
1 year					Yes / No	Yes / No	
1.5 years					Yes / No	Yes / No	
2 years					Yes / No	Yes / No	
2.5 years					Yes / No	Yes / No	
3 years					Yes / No	Yes / No	
3.5 years					Yes / No	Yes / No	
4 years					Yes / No	Yes / No	
4.5 years					Yes / No	Yes / No	
5 years					Yes / No	Yes / No	
5.5 years					Yes / No	Yes / No	
6 years					Yes / No	Yes / No	
6.5 years					Yes / No	Yes / No	
7 years					Yes / No	Yes / No	
7.5 years					Yes / No	Yes / No	
8 years					Yes / No	Yes / No	
8.5 years					Yes / No	Yes / No	
9 years					Yes / No	Yes / No	
9.5 years					Yes / No	Yes / No	
10 years					Yes / No	Yes / No	



SAFETYLINK ROOF WORKERS ACCESS KIT

IN CASE OF ACCIDENT:

- ⚠️ A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT.**
- ⚠️ PERSONS FUNCTIONING AT HEIGHTS SHOULD NOT DO SO ALONE.**

It is critical that before using any SafetyLink product a fall rescue plan is in place for any person's suspended mid-air following a fall. Serious injury or death can occur in a matter of minutes, particularly if a person's movement or breathing is restricted or loss of consciousness has occurred. In accordance with your fall rescue plan and appropriate first aid procedures it is essential to remove the person from the suspended position as quickly as possible.

EQUIPMENT WHICH HAS ARRESTED A FALL OR SHOWS A DEFECT IN ACCORDANCE WITH AS/NZS 1891.4:2009 CLAUSE 9.5

Any piece of equipment including both personal and permanently installed items, which has been used to arrest a fall or which shows any defect during operator or periodic inspection shall be withdrawn from service immediately and a replacement obtained if necessary. A label indicating the condition or defect should be attached to the equipment, and it should be examined by a competent person who will decide whether the equipment is to be destroyed or repaired if necessary and returned to service. In the latter case, details of any repair shall be documented, and a copy given to the operator.

Please refer to www.safetylink.com or below links for more information on SafetyLink's Roof Workers Kit and SafetyLink's product range.



[Harness Features](#)

[Harness Safety Check](#)

[Rope Line in Use](#)

[Catalogue](#)

[Terms/Conditions/Warranties](#)

- ⚠️ ALL PRODUCTS MUST BE USED WITHIN THEIR INTENDED DESIGN ONLY.**
- ⚠️ FAILURE TO FOLLOW ALL WARNINGS AND INSTRUCTIONS MAY RESULT IN A SERIOUS INJURY OR DEATH.**

SAFETYLINK ANCHORS		
FrogLink	TileLink	Temporary Anchor

For more SafetyLink products download Catalogue @ www.safetylink.com

1300 789 545 or +61 2 49641068
info@safetylink.com | www.safetylink.com