



PERMANENT LADDERS

Ladder lifeline – Bolted (Retro fit)



SCAN ME
Installation Handbook



SCAN ME
Catalogue



SCAN ME
Website




SCAN ME
Terms and Conditions

DATA SHEET



FS 707792

- Vertical Lifeline is designed to be retro fitted to the stiles on an existing ladder, used as a fall arrest system.
- Designed for single person use (except in emergency situations), rated for max 150kg.
- SafetyLink ladders are manufactured to AS 1657:2018 Standards.
- Ladder should be only used for access. If it is intended to work from a ladder, the work should be light duty and short duration.
- Three points of contact with the ladder should be maintained on the ladder at all times. For example, two feet one hand, one foot and two hands, two feet and the frontal D ring on a fall arrest harness attached to the fall arrest line.

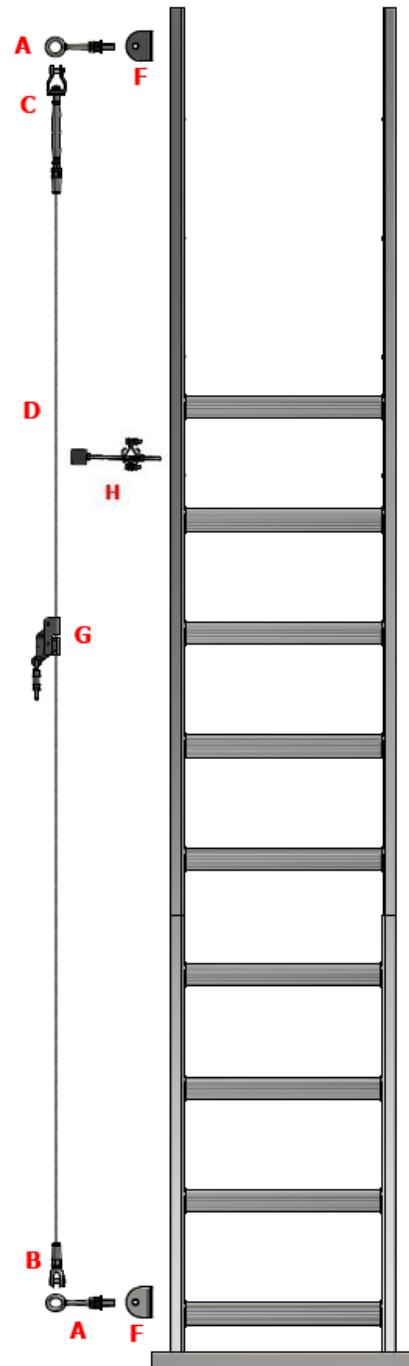

	Product Code	Description	Weight (kg)
A F	LADER001.22	Eyebolt Mounting Bracket - Bolted	0.65
B	STAT.TERMN002	Swageless Termination	0.36
C	STAT.TENSR002	Swageless Tensioner	0.63
D	STAT.CABLE001	Cable: 8mm dia, 7x7 wire rope	0.27
H	LADER001.17	Cable Guide (lines > 8 metres)	0.50
G	LADER001.10	Vertical Shuttle with Karabiner	0.64
	LADER001.11	Energy Absorber with Karabiner	0.50
	WARNG001	Warning Compliance Sign	0.08

A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT.

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-897 Version: 3.0