

BROWNBUILT SURFACELINK

Surface Mounted Anchor for Brownbuilt Roof Sheeting



SCAN ME

www.safetylink.com



SCAN ME

Catalogue




SCAN ME

Anchor Layout Video



SCAN ME

Safety Centre
Training

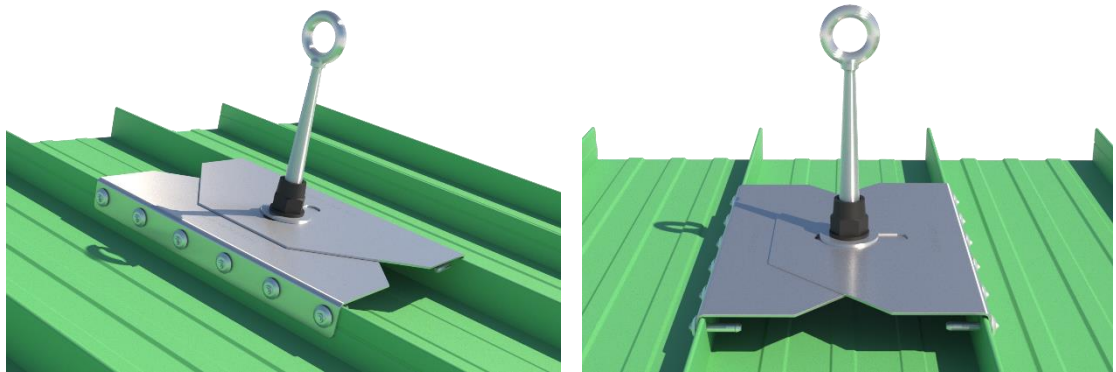

- SurfaceLink Plates bent to suit **Longline/Brownbuilt sheeting**.
- Surface mounted anchors **must not** be used for rope access (abseiling).
- Install using 12 x 8 mm Tri-fold Rivets, 7.7 x 34.0 length, 6.4-15.9 Grip, (Yellow seal) (RV6605-9-10W).
- The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

STANDARDS

Complies with AS/NZS 1891.4.

WHAT AM I USED FOR?

An anchor point designed for use on metal roof sheet profiles where access to timber is difficult. Adjustable design to suit different roof profiles.

COMPLETE UNIT - PRODUCT CODE: SURFL001-Brownbuilt			Weight: 2.026kg
Product Parts	Description	Qty	Material
EYEBOLT-SURFACELINK	SurfaceLink Eyebolt	1	316 Stainless Steel
NUT LOCKING HEX	Locking Hex Nut	1	316 Stainless Steel
SURF-SIDEPLATE-BENT	SurfaceLink Side Plate (Bent)	2	316 Stainless Steel
WASHER 70od-SS	Washers: 70 O.D.	2	316 Stainless Steel
WASHER M16_SPRING	Spring Washer: M16	1	316 Stainless Steel
NUT M16	Nut: M16	1	316 Stainless Steel
Rivet_8mm(34)	Rivets: 8mm x 34mm Tri-fold	12	Aluminium

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-62 Version: 15.0

Asia-Pacific/The Americas
info@safetylink.com

Europe/Africa/Middle East
europe.sales@safetylink.com

Northern Europe
uk.sales@safetylink.com

DATA SHEET



FS 707292