



www.safetylink.com



Catalogue




Anchor Layout Video



Safety Centre Training

DATA SHEET

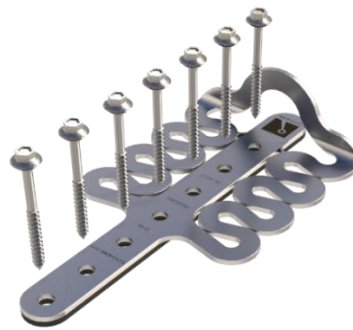

SafetyLink's patented surface mounted Froglink has set a new benchmark in the field of height safety. This revolutionary all in one unit has been designed to attach with a single row of attachment holes.

- Fast simple unit for installation, fall protection whilst working at heights.
- Low profile reflective design is a plus for any commercial or residential enterprise wanting to maintain an aesthetically pleasing façade.
- Dynamic design reduces the load back onto the structure and person attached to the anchor.
- Install using seven 14 Gauge Roofing Screws 50mm long.
- Must be used with an energy absorbing lanyard with a maximum arresting force of 6kN.

WHAT AM I USED FOR? A height safety anchor point for use on Plywood, will arrest from any direction.



STANDARDS

Complies with AS/NZS 1891.4, AS/NZS 5532-2013, OSHA 1926.502 and (Plywood – ANSI Z359_18:2017).

Product Code	Description	Weight (kg)	Rated	Material
FROGL001	Surface Mounted Anchor	0.291	15kN	316 Stainless Steel
FROGL001+Screws	Froglink Unit with 7 x 14 Gauge Roofing Screws 50mm long	0.396	15kN	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-925 Version: 2.0

Asia-Pacific/The Americas
+61 249641068
info@safetylink.com

Europe/Africa/Middle East
+33 619493867
europe.sales@safetylink.com

Northern Europe
+44 7599508290
uk.sales@safetylink.com



FS 707792