




- Gridmesh Anchor is a temporary anchor that is a two person fall protection anchorage device for use on steel structures covered by grid mesh, allowing workers to work directly below the platform.
- Can be used for materials handling purposes and is rated to 1.2T SWL.
- Can be used by rope access personnel for an anchor point.
- ONLY to be used by a competent person, trained in fall protection or materials handling.
- ONLY to be used in a vertical orientation.

STANDARDS

The Gridmesh Anchor has been tested in accordance with AS/NZS 5332 and conforms with the anchorage strength requirements of AS/NZS1891.4 as a two person anchor.

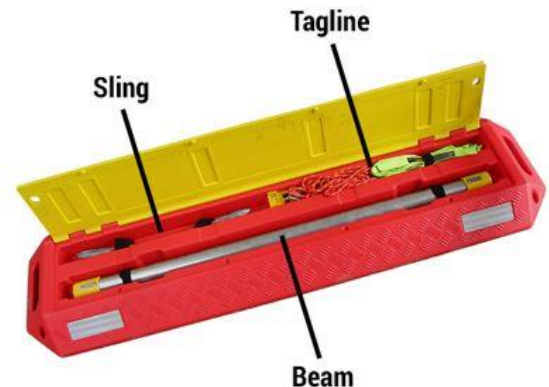

safetylink.com

WHAT AM I USED FOR?

The Gridmesh Anchor is designed to allow a worker to connect a fall arrest lanyard or self retracting lifeline (SRL) in a location directly below a walkway or trafficable area covered by Gridmesh where maintenance is required and access is difficult.



Catalogue



Safety Centre
Training

Product Code	Description	Weight (kg)	Rated
GRIDMESH.GA02	Gridmesh Personal Fall Arrest Anchor Kit (2 person Rated)	21Kg	15kN
GRIDMESH.GA03	Gridmesh Anchor Kit (Materials Handling 1.2T Rated)	21Kg	15kN

All products must be installed in accordance with the Manufacturer's installation handbook, using only products supplied.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-993 Version: 2.0