




POSITIONING OF SAFETYLINK ANCHOR POINT

The first must be in a position easily and safely reached by a secured ladder or a manhole access point.

- ▲ Used as a first man up system; reduces the amount of entry access anchors required.
- ▲ Quicklink must be attached to a load rating anchor.
- ▲ Attachment end should be secured with a strop hook when not in use to ensure it can be accessed from a safe area for next use.
- ▲ UV plastic coated to prevent wear on roof sheeting.

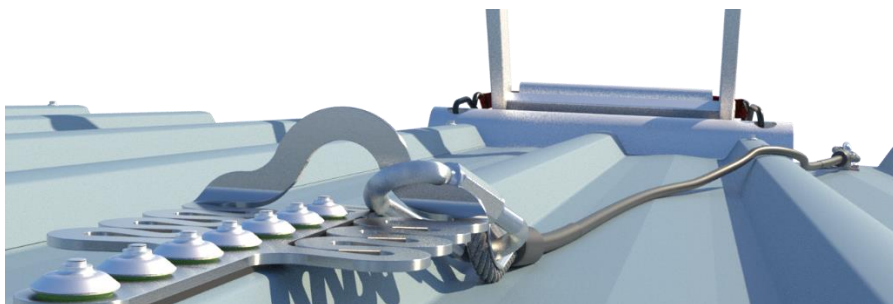

ANCHOR SYSTEM IN USE VIDEO



www.safetylink.com



Catalogue



Safety Centre
Training

PRODUCT CODE	PRODUCT DESCRIPTION
STROP001	1 metre Strop - PVC Coating SS cable with end attachments
STROP001.5	1.5 metre Strop - PVC Coating SS cable with end attachments
STROP002	2 metre Strop - PVC Coating SS cable with end attachments
STROP002.5	2.5 metre Strop - PVC Coating SS cable with end attachments
STROP003	3 metre Strop - PVC Coating SS cable with end attachments
STROP003.5	3.5 metre Strop - PVC Coating SS cable with end attachments
STROP004	4 metre Strop - PVC Coating SS cable with end attachments
STROP004.5	4.5 metre Strop - PVC Coating SS cable with end attachments
STROP005	5 metre Strop - PVC Coating SS cable with end attachments

STROP HOOK WITH WARNING TAG

Product Code: Strophook+Sign

- NOT INCLUDED with strops, to order **Product Code: Strophook+Sign**
- Secures the attachment point of the strop when not in use, ensuring the wind cannot blow the strop away from access point.
- Please note this is not a load rated anchor, only to be used as an accessory to secure the strop.
- Hook can be secured with 2 screws or 2 rivets.
- Sprung Gate for easy and secure use.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-168 Version: 12.0