


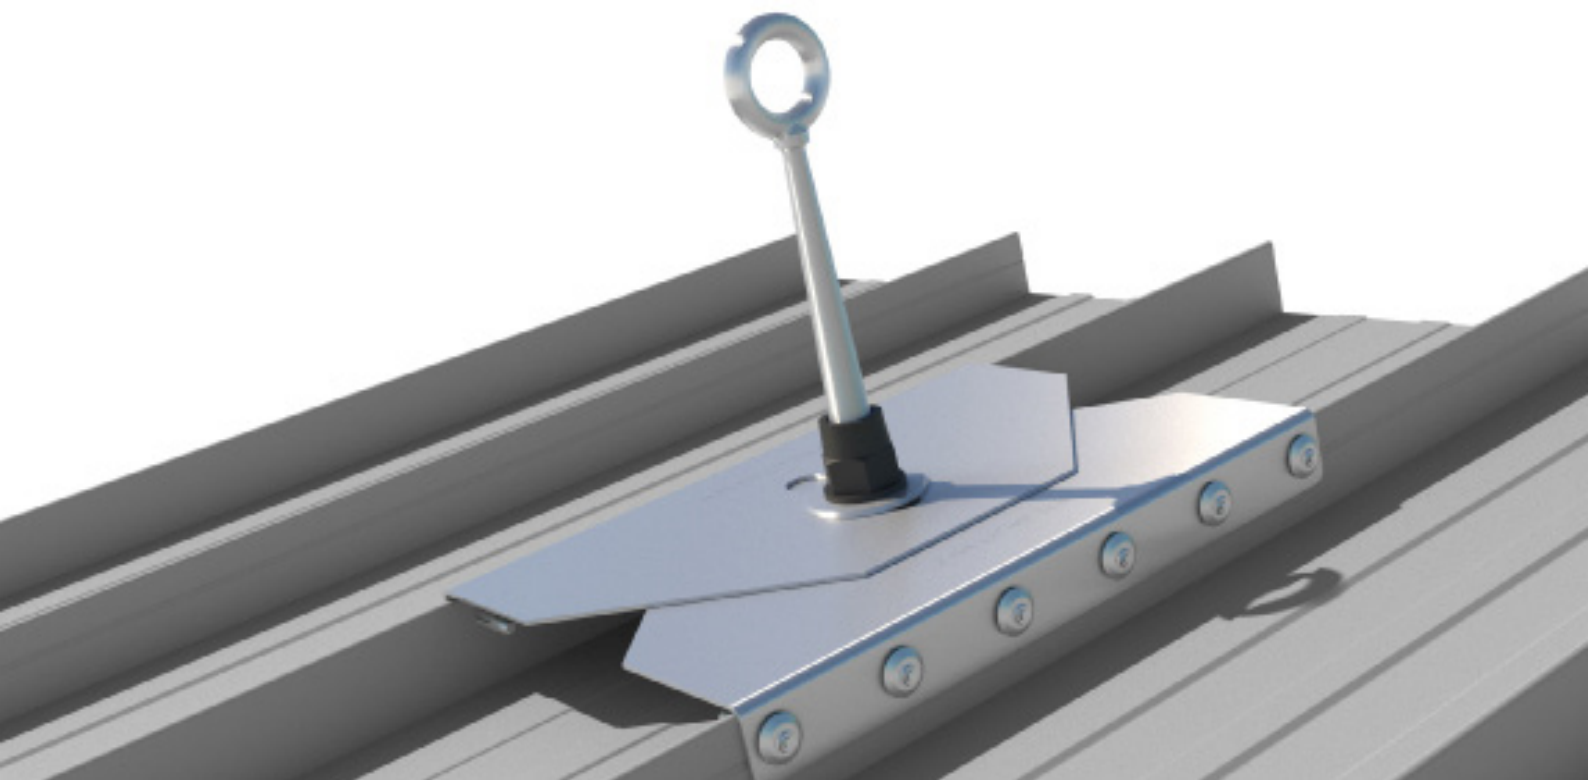

SurfaceLink Brownbuilt

Surface Mounted Anchor

SafetyLinks Brownbuilt SurfaceLink is designed for use on metal roof sheet profiles where access to timber is difficult. Adjustable design to suit different roof profiles.

- ▲ SurfaceLink Plates bent to suit Longline / Brownbuilt sheeting.
- ▲ Surface mounted anchors must not be used for rope access(abseiling).
- ▲ Install using 12 x 8 mm Bulbtite Rivets, 7.7 x 34.0 length, 6.4 15.9 Grip, (Yellow seal) (RV6605-9-10W).
- ▲ Multi-directional fall protection.
- ▲ Single person energy absorbing anchor.
- ▲ Rated at 15kN. Complies with AS/NZS 1891.4.

Benefits of choosing SafetyLink:

SafetyLink's unique designed roof anchors provide fall restraint and fall arrest safety for residential, commercial and industrial buildings. Our roof anchors have patented designs which absorb energy, which means if in the event of a fall the anchor absorbs energy therefore reducing risk of injury to the person and damage to the structure.

SafetyLink's designs represent a perfect engineered solution for working at heights and roof safety fall protection.

SafetyLink will provide you with the following:

- ▲ All products tested and manufactured to current Standards.
- ▲ All distributors and installers are trained to use SafetyLink products.
- ▲ Supply installation guides, testing results and product sheets.
- ▲ Layout Design Service providing compliant roof safety systems.
- ▲ Supply a large range of roof anchors that protect you from the ground up, allowing complete access to your roof.
- ▲ Installers are qualified to do yearly inspections on your anchors as per current Standard.

SafetyLink Pty Ltd 1300 789 545
+61 2 4964 1068 info@safetylink.com



**'Innovative
Fall Protection'**



SAFETYLINK

A DELTA PLUS GROUP COMPANY

For further information please visit our website www.SafetyLink.com