


SURFACELINK - Surface Mounted Anchor for Brownbuilt Roof

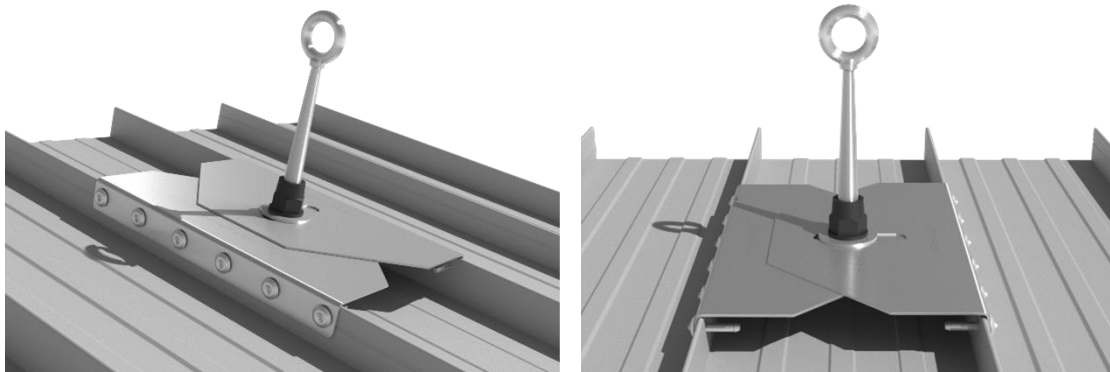

- ▲ SurfaceLink Plates bent to suit **Longline/Brownbuilt sheeting**.
- ▲ Surface mounted anchors must not be used for rope access (abseiling).
- ▲ Install using 12 x 8 mm Tri-fold Rivets, 7.7 x 34.0 length, 6.4-15.9 Grip, (Yellow seal) (RV6605-9-10W).
- ▲ The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

STANDARDS

Complies with AS/NZS 1891.4.

WHAT AM I USED FOR?

An anchor point designed for use on metal roof sheet profiles where access to timber is difficult. Adjustable design to suit different roof profiles.



SCAN ME

safetylink.com



SCAN ME

Catalogue



SCAN ME

Safety Centre
Training

COMPLETE UNIT - PRODUCT CODE: SURFL001-Brownbuilt			Weight: 2.026kg
Product Parts	Description	Qty	Material
EYEBOLT-SURFACELINK	SurfaceLink Eyebolt	1	316 Stainless Steel
NUT LOCKING HEX	Locking Hex Nut	1	316 Stainless Steel
SURF-SIDEPLATE-BENT	SurfaceLink Side Plate (Bent)	2	316 Stainless Steel
WASHER 70od-SS	Washers: 70 O.D.	2	316 Stainless Steel
WASHER M16_SPRING	Spring Washer: M16	1	316 Stainless Steel
NUT M16	Nut: M16	1	316 Stainless Steel
Rivet_8mm(34)	Rivets: 8mm x 34mm Tri-fold	12	Aluminium

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-62 Version: 16.0