




SafetyLink's team designed the TileLink roof anchor (**winner of an episode on ABC1 The New Inventors**) with unique energy absorbing capabilities, to reduce the risk of injury to the person and damage to the structure.

- ▲ Fast simple unit for installation, fall protection whilst working at heights.
- ▲ Low profile reflective design is a plus for any commercial or residential enterprise wanting to maintain an aesthetically pleasing façade.
- ▲ Designed for use on timber rafters under tiles, no need to cut sarking, eliminating waterproofing issues.
- ▲ Install with five (5) alternate fixing rows: use 5 x 12 gauge (50mm) roofing screws.
- ▲ Highly flexible design ensures installation to the majority of roof tile profiles.

WHAT AM I USED FOR?

A height safety anchor point designed for use on timber rafters with tiled roof, will arrest from any direction.

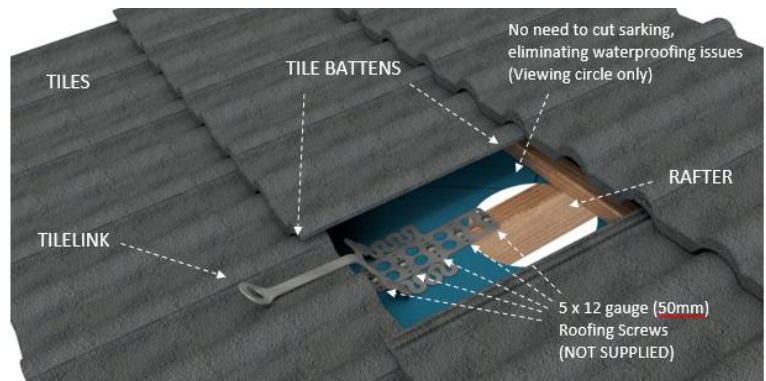

STANDARDS

Complies with: AS/NZS 1891.4 and EN 795:2012.

Product Code	Description	Weight (kg)	Rated	Material
TILEL001	Rafter Mounted Anchor	0.634	15kN	316 Stainless Steel
TILEL001+Screws	Rafter Mounted Anchor + 5 Tek Screws	0.679	15kN	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-58 Version: 17.0



SCAN ME

safetylink.com



SCAN ME

Catalogue



SCAN ME

Safety Centre
Training