


- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

75 DEGREE INTERNAL ACCESS

FLAT SURFACE TO ROOF SHEETING		LADERK002.031	LADERK002.032
Product Code	Description	2180mm	3340mm
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	0	1
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	1	1
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	0	1
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	1	1
LADER002.BRK250	Ladder Fixing Bracket: 250mm	1	1
LADER002.BRKADJ.600-1000	Ladder Fixing Bracket: 600-1000mm	0	1
GUARD001.HATCH_SM	Hatch: Roof Mount Guardrail Kit	1	1
LADER002.CAP.K	Ladder Stile Cap Set	1	1
LADER002.SIGN	FastFit Entry Compliance Sign	1	1
ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE			
FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADERK002.031 +FOOT KIT	LADERK002.032 + FOOT KIT
		2450mm	3610mm
LADER002.FOOT.75.K	Kit: 2 x Ladder Foot: 75 degrees with 4 Screws	1	1
FLAT SURFACE TO ROOF SHEETING WITH LOCKABLE DOOR		LADERK002.031 + DOOR	LADERK002.032 + DOOR
LADER002.DOOR	Ladder Door	1	1

FLAT SURFACE TO ROOF SHEETING Below Drawing: LADERK002.032 + HATCH_SM

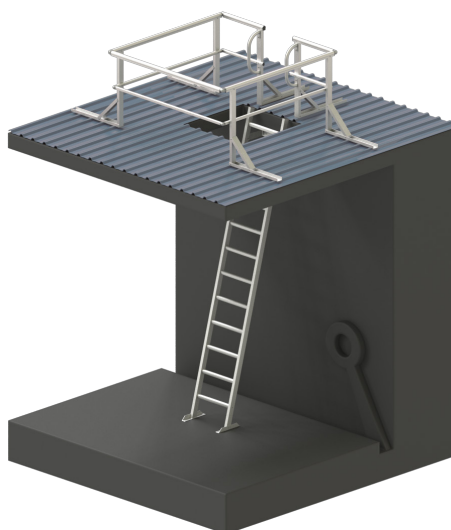

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME