

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

75 DEGREE LADDER WITH TOP PLATFORM & CAGE

FLAT SURFACE TO ROOF SHEETING		LADERK002.041	LADERK002.042	LADERK002.043
Product Code	Description	2200mm	3360mm	4510mm
LADER002.LHD	Ladder Head: 2400mm (5 Rung 1324mm)	1	1	1
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	1	0	1
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	0	1	1
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	1	1	2
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	1	1	1
LADER002.BRK250	Ladder Fixing Bracket: 250mm	1	1	1
LADER002.BRKADJ.600-1000	Ladder Fixing Bracket: 600-1000mm	0	1	1
LADER002.BRKADJ.800-1200	Ladder Fixing Bracket: 800-1200mm	0	0	0
LADER002.CAGE.2	Ladder Cage: (0.01m to 2.0m)	1	0	0
LADER002.CAGE.3	Ladder Cage: (2.01m to 3.0m)	0	1	0
LADER002.CAGE.3.1+2	Ladder Cage: (2.01m to 3.0m) Kit (1m+2m+Joiner)	0	0	0
LADER002.CAGE.4	Ladder Cage: (3.01m to 4.0m)	0	0	1
LADER002.CAGE.4.2+2	Ladder Cage: (3.01m to 4.0m) Kit (2m+2m+Joiner)	0	0	0
LADER002.CAGE.5	Ladder Cage: (4.01m to 5.0m)	0	0	0
LADER002.CAGE.5.2+3	Ladder Cage: (4.01m to 5.0m) Kit (2m+3m+Joiner)	0	0	0
LADER002.CAGE.GATE.R	Lockable Ladder Cage Gate (Reversible)	1	1	1
LADER002.HR.75.K	Handrail Set: 75 degrees (2 arms)	1	1	1
LADER002.PLT.TOP	Platform: Top (Required if exit area not level)	1	1	1
LADER002.CAP.K	Ladder Stile Cap Set	1	1	1
LADER002.SIGN	FastFit Entry Compliance Sign	1	1	1

ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE

FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADERK002.041 +FOOT KIT	LADERK002.042 +FOOT KIT	LADERK002.043 +FOOT KIT
		2470mm	3630mm	4790mm
LADER002.FOOT.75.K	Kit: 2 x Ladder Foot: 75 degrees with 4 Screws	1	1	1

ROOF SHEETING TO ROOF SHEETING (Platform installed in front of ladder)		LADERK002.041 +BASE	LADERK002.042 +BASE	LADERK002.043 +BASE
		2330mm	3490mm	4640mm
LADER002.PLT.BASE	Platform: Adjustable Base (Required if entry area not level)	1	1	N/A

ROOF SHEETING TO ROOF SHEETING (Ladder installed on top of platform)		LADERK002.041 +FOOTING	LADERK002.042 +FOOTING	LADERK002.043 +FOOTING
		2270mm	3430mm	4580mm
LADER002.PLT.FOOT	Platform: Footing Landing (Required if entry area not level)	1	1	1

NOTE: For all kits with the roof sheeting to roof sheeting option that is N/A, installation is permitted if the heavy duty base angles LADER002.BASE.ANGLE_2X500HD are used instead of LADER002.BASE.ANGLE_2X350.

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

LADERK002.044	LADERK002.045 (2 PIECE CAGE)	LADERK002.046 (2 PIECE CAGE)	LADERK002.047 (2 PIECE CAGE)
5670mm	3360mm	4510mm	5670mm
1	1	1	1
0	0	1	0
2	1	1	2
2	1	2	2
1	1	1	1
1	1	1	1
1	1	1	1
0	0	0	1
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0
0	0	1	0
1	0	0	0
0	0	0	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1


LADERK002.044 +FOOT KIT	LADERK002.045 +FOOT KIT	LADERK002.046 +FOOT KIT	LADERK002.047 +FOOT KIT
5950mm	3630mm	4790mm	5950mm
1	1	1	1

LADERK002.044 +BASE	LADERK002.045 +BASE	LADERK002.046 +BASE	LADERK002.047 +BASE
5800mm	3490mm	4640mm	5800mm
N/A	1	N/A	N/A

LADERK002.044 +FOOTING	LADERK002.045 +FOOTING	LADERK002.046 +FOOTING	LADERK002.047 +FOOTING
5740mm	3430mm	4580mm	5740mm
1	1	1	1

FLAT SURFACE TO ROOF SHEETING

Below Drawing: LADERK002.042

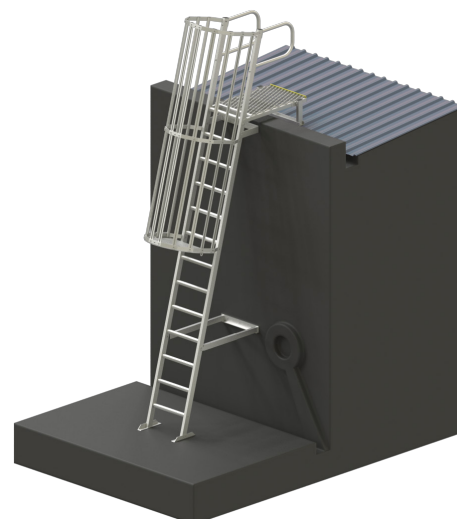

ROOF SHEETING TO ROOF SHEETING

Below Drawing: LADERK002.042+BASE



Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME