

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

75 DEGREE LADDER WITH 2.4m ADJUSTABLE PLATFORM & CAGE

FLAT SURFACE TO ROOF SHEETING		LADERK002.061	LADERK002.062	LADERK002.063
Product Code	Description	2200mm	3360mm	4510mm
LADER002.LHD	Ladder Head: 2400mm (5 Rung 1324mm)	1	1	1
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	1	0	1
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	0	1	1
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	1	1	2
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	1	1	1
LADER002.BRK250	Ladder Fixing Bracket: 250mm	1	1	1
LADER002.BRKADJ.600-1000	Ladder Fixing Bracket: 600-1000mm	0	1	1
LADER002.CAGE.2	Ladder Cage: (1.01 to 2.0 metres)	1	0	0
LADER002.CAGE.3	Ladder Cage: (2.01 to 3.0 metres)	0	1	0
LADER002.CAGE.3.1+2	Ladder Cage: (2.01 to 3.0 metres) (1m+2m)	0	0	0
LADER002.CAGE.4	Ladder Cage: (3.01 to 4.0 metres)	0	0	1
LADER002.CAGE.4.2+2	Ladder Cage: (3.01 to 4.0 metres) (2m+2m)	0	0	0
LADER002.CAGE.5	Ladder Cage: (4.01 to 5.0 metres)	0	0	0
LADER002.CAGE.5.2+3	Ladder Cage: (4.01 to 5.0 metres) (2m+3m)	0	0	0
LADER002.CAGE.GATE.R	Lockable Ladder Cage Gate (Reversible)	1	1	1
LADER002.PLT.ADJ.2400	Platform: 2400mm Adjustable Landing	1	1	1
LADER002.CAP.K	Ladder Stile Cap Set	1	1	1
LADER002.SIGN	FastFit Entry Compliance Sign	1	1	1

ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE

FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADERK002.061 + FOOT KIT	LADERK002.062 + FOOT KIT	LADERK002.063 + FOOT KIT
		2470mm	3630mm	4790mm
LADER002.FOOT.75.K	Kit: 2 x Ladder Foot: 75 degrees with 4 Screws	1	1	1

ROOF SHEETING TO ROOF SHEETING (Platform installed in front of ladder)		LADERK002.061 + BASE	LADERK002.062 + BASE	LADERK002.063 + BASE
		2330mm	3490mm	N/A
LADER002.PLT.BASE	Platform: Adjustable Base (Required if entry area not level)	1	1	N/A

ROOF SHEETING TO ROOF SHEETING (Ladder installed on top of platform)		LADERK002.061 + FOOTING	LADERK002.062 + FOOTING	LADERK002.063 + FOOTING
		2270mm	3430mm	4580mm
LADER002.PLT.FOOT	Platform: Footing Landing (Required if entry area not level)	1	1	1

NOTE: For all kits with the roof sheeting to roof sheeting option that is N/A, installation is permitted if the heavy duty base angles LADER002.BASE.ANGLE_2X500HD are used instead of LADER002.BASE.ANGLE_2X350.

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

LADERK002.064	LADERK002.065 (2 PIECE CAGE)	LADERK002.066 (2 PIECE CAGE)	LADERK002.067 (2 PIECE CAGE)
5670mm	3360mm	4510mm	5670mm

1	1	1	1
0	0	1	0
2	1	1	2
2	1	2	2
1	1	1	1
1	1	1	1
1	1	1	1
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0
0	0	1	0
1	0	0	0
0	0	0	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1

LADERK002.064 + FOOT KIT	LADERK002.065 + FOOT KIT	LADERK002.066 + FOOT KIT	LADERK002.067 + FOOT KIT
5950mm	3630mm	4790mm	5950mm
1	1	1	1

LADERK002.064 + BASE	LADERK002.065 + BASE	LADERK002.066 + BASE	LADERK002.067 + BASE
N/A	3490mm	N/A	N/A
N/A	1	N/A	N/A

LADERK002.064 + FOOTING	LADERK002.065 + FOOTING	LADERK002.066 + FOOTING	LADERK002.067 + FOOTING
5740mm	3430mm	4580mm	5740mm
1	1	1	1


FLAT SURFACE TO ROOF SHEETING

Below Drawing: LADERK002.062



ROOF SHEETING TO ROOF SHEETING

Below Drawing: LADERK002.062+BASE

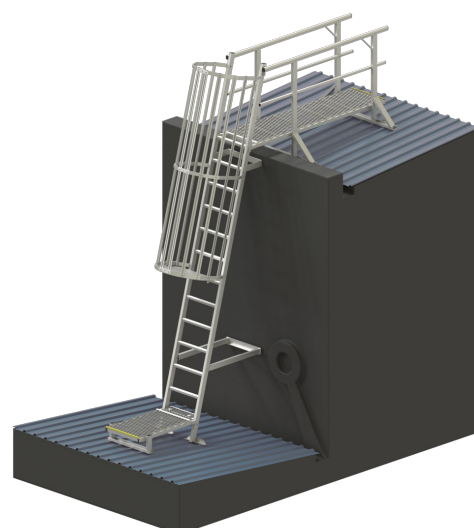

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME