


- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

75 DEGREE LADDER WITH MIDWAY REST PLATFORM & TOP LANDING PLATFORM (Purlin Mounted)

FLAT SURFACE TO ROOF SHEETING		LADERK002.091_PUR	LADERK002.092_PUR	LADERK002.093_PUR	LADERK002.094_PUR	LADERK002.095_PUR
Product Code	Description	6800mm	7960mm	9120mm	10280mm	11430mm
LADER002.LHD	Ladder Head: 2400mm (5 Rung 1324mm)	2	2	2	2	2
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	0	1	2	1	0
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	2	2	2	3	4
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	2	3	4	4	4
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	2	2	2	2	2
LADER002.BRK.250	Ladder Fixing Bracket: 250mm	2	2	2	2	2
LADER002.BRK.SIDE	Ladder Fixing Bracket: Side Mount 1100x795mm	2	2	2	2	2
STAIRM.BRK.LND75	Ladder Fixing Bracket Landing for 75 degrees	2	2	2	2	2
LADER002.PLT.MID.M	Platform: 2000x1200mm Midway Rest	1	1	1	1	1
LADER002.PLT.TOP.32.M_PUR	Platform: Landing Top 3200mm, Purlin Mount	1	1	1	1	1
LADER002.PLT.MID.M.05	Purlin Mount Kit for Midway Landing Platform	1	1	1	1	1
LADER002.CAGE.3	Ladder Cage: (2.01 to 3.0 metres)	2	1	0	0	0
LADER002.CAGE.4	Ladder Cage: (3.01 to 4.0 metres)	0	1	2	1	0
LADER002.CAGE.5	Ladder Cage: (4.01 to 5.0 metres)	0	0	0	1	2
LADER002.CAGE.GATE.R	Lockable Ladder Cage Gate (Reversible)	1	1	1	1	1
LADER002.CAGE.EXTN	Side Protection Extension	1	1	1	1	1
LADER002.CAP.K	Ladder Stile Cap Set	2	2	2	2	2
LADER002.SIGN	FastFit Entry Compliance Sign	1	1	1	1	1
ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE						
FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADERK002.091 + FOOT KIT	LADERK002.092 + FOOT KIT	LADERK002.093 + FOOT KIT	LADERK002.094 + FOOT KIT	LADERK002.095 + FOOT KIT
		7070mm	8230mm	9390mm	10550mm	11700mm
LADER002.FOOT.75.K	Kit: 2 x Ladder Foot: 75 degrees with 4 Screws	1	1	1	1	1
ROOF SHEETING TO ROOF SHEETING		LADERK002.091 + BASE	LADERK002.092 + BASE	LADERK002.093 + BASE	LADERK002.094 + BASE	LADERK002.095 + BASE
(Platform installed in front of Ladder)		6930mm	8090mm	9250mm	N/A	N/A
LADER002.PLT.BASE Platform: Adjustable Base (Required if entry area not level)		1	1	1	N/A	N/A
ROOF SHEETING TO ROOF SHEETING		LADERK002.091 + FOOTING	LADERK002.092 + FOOTING	LADERK002.093 + FOOTING	LADERK002.094 + FOOTING	LADERK002.095 + FOOTING
(Ladder installed on top of Platform)		6870mm	8030mm	9190mm	10350mm	11500mm
LADER002.PLT.FOOT Platform: Footing Landing (Required if entry area not level)		1	1	1	1	1

FLAT SURFACE TO ROOF SHEETING

Below Drawing: LADERK002.091+BASE

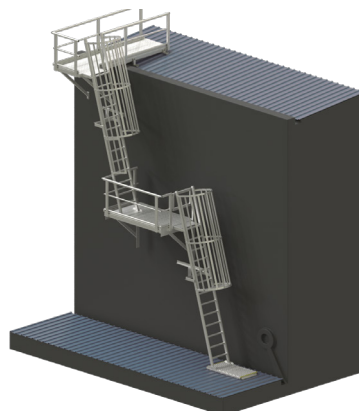

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

enjoy safety.

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME