

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

90 DEGREE LADDER WITH TOP PLATFORM & CAGE

FLAT SURFACE TO ROOF SHEETING		LADERK002.121	LADERK002.122	LADERK002.123
Product Code	Description	2280mm	3480mm	4680mm
LADER002.LHD	Ladder Head: 2400mm (5 Rung 1324mm)	1	1	1
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	1	0	1
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	0	1	1
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	1	1	2
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	1	1	1
LADER002.BRK250	Ladder Fixing Bracket: 250mm	1	2	2
LADER002.CAGE.2	Ladder Cage: (1.01 to 2.0 metres)	1	0	0
LADER002.CAGE.3	Ladder Cage: (2.01 to 3.0 metres)	0	1	0
LADER002.CAGE.3.1+2	Ladder Cage: (2.01 to 3.0 metres) (1m+2m)	0	0	0
LADER002.CAGE.4	Ladder Cage: (3.01 to 4.0 metres)	0	0	1
LADER002.CAGE.4.2+2	Ladder Cage: (3.01 to 4.0 metres) (2m+2m)	0	0	0
LADER002.CAGE.5	Ladder Cage: (4.01 to 5.0 metres)	0	0	0
LADER002.CAGE.5.2+3	Ladder Cage: (4.01 to 5.0 metres) (2m+3m)	0	0	0
LADER002.CAGE.GATE.R	Lockable Ladder Cage Gate (Reversible)	1	1	1
LADER002.HR.90.K	Handrail Set: 90 degrees (2 arms)	1	1	1
LADER002.PLT.TOP	Platform: Top (Required if exit area not level)	1	1	1
LADER002.CAP.K	Ladder Stile Cap Set	1	1	1
LADER002.SIGN	FastFit Entry Compliance Sign	1	1	1

ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE

FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADER002.121 + FOOT KIT	LADER002.122 + FOOT KIT	LADER002.123 + FOOT KIT
		2580mm	3780mm	4980mm
LADER002.FOOT.90.K	Kit: 2 x Ladder Foot: 90 degrees with 4 Screws	1	1	1

ROOF SHEETING TO ROOF SHEETING (Platform installed in front of ladder)		LADER002.121 + BASE	LADER002.122 + BASE	LADER002.123 + BASE
		2400mm	3600mm	N/A
LADER002.PLT.BASE	Platform: Adjustable Base (Required if entry area not level)	1	1	N/A

ROOF SHEETING TO ROOF SHEETING (Ladder installed on top of platform)		LADER002.121 + FOOTING	LADER002.122 + FOOTING	LADER002.123 + FOOTING
		2350mm	3550mm	4750mm
LADER002.PLT.FOOT	Platform: Footing Landing (Required if entry area not level)	1	1	1

NOTE: For all kits with the roof sheeting to roof sheeting option that is N/A, installation is permitted if the heavy duty base angles LADER002.BASE.ANGLE_2X500HD are used instead of LADER002.BASE.ANGLE_2X350.

Install Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

LADERK002.124	LADERK002.125 (2 PIECE CAGE)	LADERK002.126 (2 PIECE CAGE)	LADERK002.127 (2 PIECE CAGE)
5880mm	3480mm	4680mm	5880mm
1	1	1	1
0	0	1	0
2	1	1	2
2	1	2	2
1	1	1	1
2	2	2	2
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0
0	0	1	0
1	0	0	0
0	0	0	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1
1	1	1	1


LADER002.124 + FOOT KIT	LADER002.125 + FOOT KIT	LADER002.126 + FOOT KIT	LADER002.127 + FOOT KIT
6180mm	3780mm	4980mm	N/A
1	1	1	1

LADER002.124 + BASE	LADER002.125 + BASE	LADER002.126 + BASE	LADER002.127 + BASE
N/A	3600mm	N/A	N/A
N/A	1	N/A	N/A

LADER002.124 + FOOTING	LADER002.125 + FOOTING	LADER002.126 + FOOTING	LADER002.127 + FOOTING
5950mm	3550mm	4750mm	5950mm
1	1	1	1


FLAT SURFACE TO ROOF SHEETING

Below Drawing: LADERK002.122

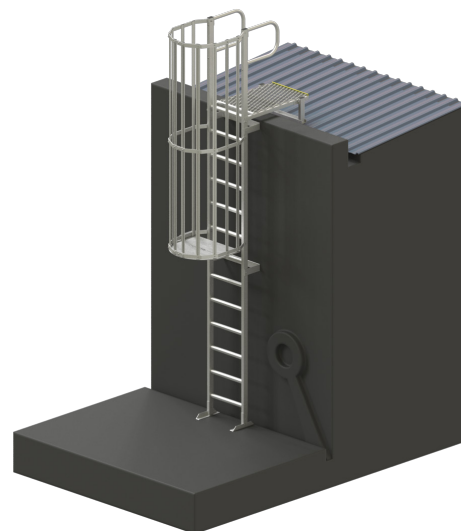

ROOF SHEETING TO ROOF SHEETING

Below Drawing: LADERK002.122+BASE

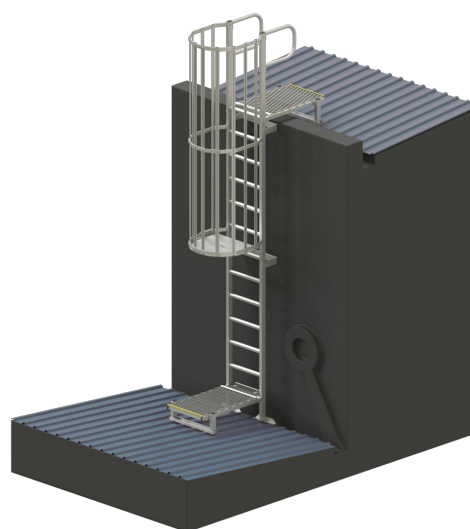

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME