

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.

90 DEGREE LADDER WITH MIDWAY REST & TOP ADJUSTABLE PLATFORM

FLAT SURFACE TO ROOF SHEETING		LADERK002.171	LADERK002.172	LADERK002.173
Product Code	Description	6780mm	7980mm	9180mm
LADER002.LHD	Ladder Head: 2400mm (5 rung 1324mm)	1	1	1
LADER002.SEC.4	Ladder Section: 1200mm (4 rung)	0	1	2
LADER002.SEC.8	Ladder Section: 2400mm (8 rung)	3	3	3
LADER002.SPL.K	Kit: 2 x Splice Joint 600mm and 8 Screws	2	4	4
LADER002.BASE.ANGLE_2x350	Ladder Base Support Angle: 2x350mm	2	2	2
LADER002.BRK250	Ladder Fixing Bracket: 250mm	4	4	5
LADER002.CAGE.1.3	Ladder Half Cage: 1300mm	1	1	1
LADER002.CAGE.2	Ladder Cage: (1.01 to 2.0 metres)	1	0	0
LADER002.CAGE.3	Ladder Cage: (2.01 to 3.0 metres)	1	2	1
LADER002.CAGE.4	Ladder Cage: (3.01 to 4.0 metres)	0	0	1
LADER002.CAGE.5	Ladder Cage: (4.01 to 5.0 metres)	0	0	0
LADER002.CAGE.GATE.R	Lockable Ladder Cage Gate (Reversible)	1	1	1
LADER002.CAGE.EXTN	Side Protection Extension	1	1	1
LADER002.CAGE.JOIN	Cage Joiner Kit	1	1	1
LADER002.PLT.MID.M	Platform: Midway Rest Side Entry	1	1	1
LADER002.PLT.ADJ.2400	Platform: Adjustable Landing 2400mm	1	1	1
LADER002.CAP.K	Ladder Stile Cap Set	2	2	2
LADER002.SIGN	FastFit Entry Compliance Sign	1	1	1

ADDITIONAL COMPONENTS NOT INCLUDED IN ABOVE

FLAT SURFACE TO ROOF SHEETING WITH EXTENSION FOOT KIT		LADERK002.171 + FOOT KIT	LADERK002.172 + FOOT KIT	LADERK002.173 + FOOT KIT
		7080mm	8280mm	9480mm
LADER002.FOOT.90.K	Kit: 2 x Ladder Foot: 90 degrees with 4 Screws	1	1	1

ROOF SHEETING TO ROOF SHEETING (Platform installed in front of ladder)		LADERK002.171 + BASE	LADERK002.172 + BASE	LADERK002.173 + BASE
		7025mm	8225mm	9425mm
LADER002.PLT.BASE	Platform: Adjustable Base (Required if entry area not level)	1	1	1

ROOF SHEETING TO ROOF SHEETING (Ladder installed on top of platform)		LADERK002.171 + FOOTING	LADERK002.172 + FOOTING	LADERK002.173 + FOOTING
		6850mm	8050mm	9250mm
LADER002.PLT.FOOT	Platform: Footing Landing (Required if entry area not level)	1	1	1

NOTE: For all kits with the roof sheeting to roof sheeting option that is N/A, installation is permitted if the heavy duty base angles LADER002.BASE.ANGLE_2X500HD are used instead of LADER002.BASE.ANGLE_2X350.

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME

- FastFit ladder system is designed for single person use and rated for maximum 150kg.
- FastFit ladders are manufactured to AS 1657:2018 Standards.


LADERK002.174	LADERK002.175
10380mm	11580mm
1	1
1	0
4	5
4	4
2	2
5	5
1	1
0	0
0	0
2	1
0	1
1	1
1	1
1	1
1	1
2	2
1	1

LADERK002.174 + FOOT KIT	LADERK002.175 + FOOT KIT
10680mm	11880mm
1	1

LADERK002.174 + BASE	LADERK002.175 + BASE
N/A	N/A
N/A	N/A

LADERK002.174 + FOOTING	LADERK002.175 + FOOTING
10450mm	11650mm

ROOF SHEETING TO ROOF SHEETING
Below Drawing: LADERK002.171+FOOTING

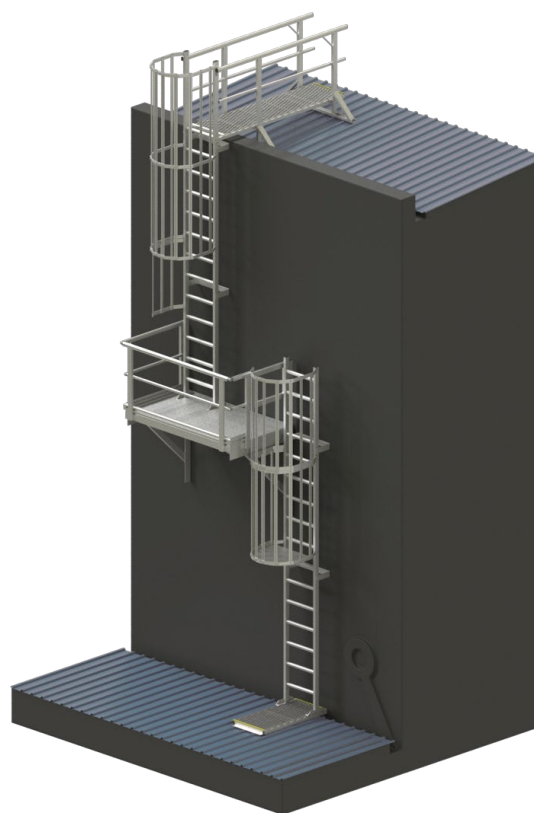

Install
Handbook



SCAN ME

Training



SCAN ME

Website



SCAN ME

Catalogue



SCAN ME