



Product Code: LEADFLASH001

- ▲ Manufactured with Acryflash®, a lead sheet that is drinking water compliant to AS/NZS 4020:2005.
- ▲ Acrylic coating helps prevent lead leaching.
- ▲ Can be painted to match roof colour with acrylic house paint.
- ▲ Polymer is Ozone and UV resistant.
- ▲ Safe to handle.
- ▲ 20 year warranty.
- ▲ BAL certified.

Size Chart

METRIC: Pipe Size (25° roof pitch)	METRIC: Pipe Size (45° roof pitch)	IMPERIAL: Pipe Size (25° roof pitch)	IMPERIAL: Pipe Size (45° roof pitch)	Base Size
5-50mm	5-40mm	½"-2"	½"-1½"	490x410mm

*EPDM will withstand constant temperatures of -40°C (-40°F) to 115°C (239°F). *Silicone will withstand constant temperatures of -50°C (-58°F) to 240°C (464°F).




www.safetylink.com



Catalogue



Safety Centre
Training

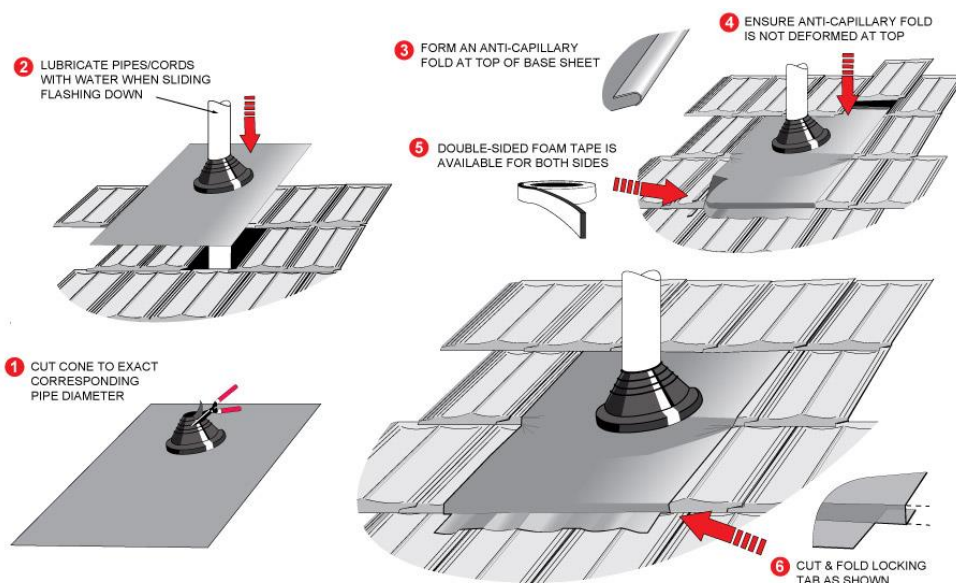

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-186 Version: 10.0