



TILELINK

Timber Rafter Mounted Anchor



Terms and Conditions



Website



SafetyLink's team designed the TileLink roof anchor (**winner of an episode on ABC1 The New Inventors**) with unique energy absorbing capabilities, to reduce the risk of injury to the person and damage to the structure.


- Fast simple unit for installation, fall protection whilst working at heights.
- Low profile reflective design is a plus for any commercial or residential enterprise wanting to maintain an aesthetically pleasing façade.
- Designed for use on timber rafters under tiles, no need to cut sarking, eliminating waterproofing issues.
- Install with five (5) alternate fixing rows: use 5 x 12 gauge (50mm) roofing screws.
- Highly flexible design ensures installation to the majority of roof tile profiles.

WHAT AM I USED FOR?

A height safety anchor point designed for use on timber rafters with tiled roof, will arrest from any direction.

STANDARDS

Complies with: AS/NZS 1891.4.

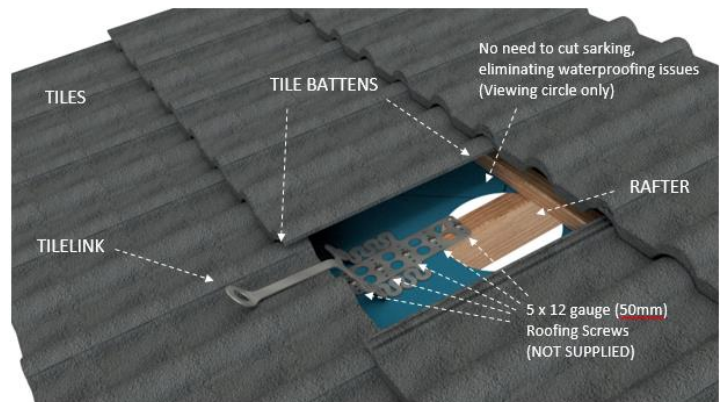

| Product Code | Description | Weight | Rated | Material |
|-----------------|--------------------------------------|--------|-------|---------------------|
| TILEL001 | Rafter Mounted Anchor | .634g | 15kN | 316 Stainless Steel |
| TILEL001+Screws | Rafter Mounted Anchor + 5 Tek Screws | .679g | 15kN | 316 Stainless Steel |



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Version 05.18

DATA SHEET