



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

# CLASSIC LIFELINE

Concrete INTERMEDIATE Anchor | Product Code: STAT.CONCL001



- Energy absorbing lifeline INTERMEDIATE anchor point.
- Specifically for use with permanent horizontal height safety lifeline systems into concrete.
- Must be chemically fastened.
- Constructed entirely of stainless steel.
- Equipped with an engineered energy absorbing region to minimise loads on users and structures in the event of a fall.
- Intended for use with 8mm stainless steel cables.
- Complies with AS/NZS 1891.2.

## What am I used for?

A height safety system anchor point designed to be mounted into a concrete structure as part of a permanent horizontal lifeline system to limit lifeline span distances to under ten (10) metres.

- ⚠ **MAXIMUM USER PER SYSTEM IS FOUR (4).**
- ⚠ **MAXIMUM PERSON PER SPAN IS TWO (2).**
- ⚠ **SEE SYSTEM INFORMATION FOR SITE SPECIFIC USE.**

## Testing for Free fall-arrest for one person. 15 kN ultimate strength.

To comply with Australian Standards each ConcreteLink unit must be tested after installation. Allow sufficient time (at least 48 hours) for curing before testing. *Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.*

- ⚠ **Concrete anchor has to be proof loaded to a pull-out force of 7.5kN.**

*Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data Sheets. Read instructions on product carefully. The entire surface of the ConcreteLink unit that is in contact with the concrete must have sufficient adhesive gel, as specified on the product.*

PRODUCT COMPONENTS	QUANTITY
ConcreteLink Insert 90mm, 16mm Thread	1
Intermediate T-Bolt	1
Locking Hex Nut	1

Version 08.17



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.


# PRODUCT SHEET

## POSITIONING LAYOUT

*This is a guide only*

All working at heights safety procedures must be complied with when installing SafetyLink height safety systems. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.

Horizontal height safety lifelines must only be installed and used by competent people with relevant current height safety qualifications.

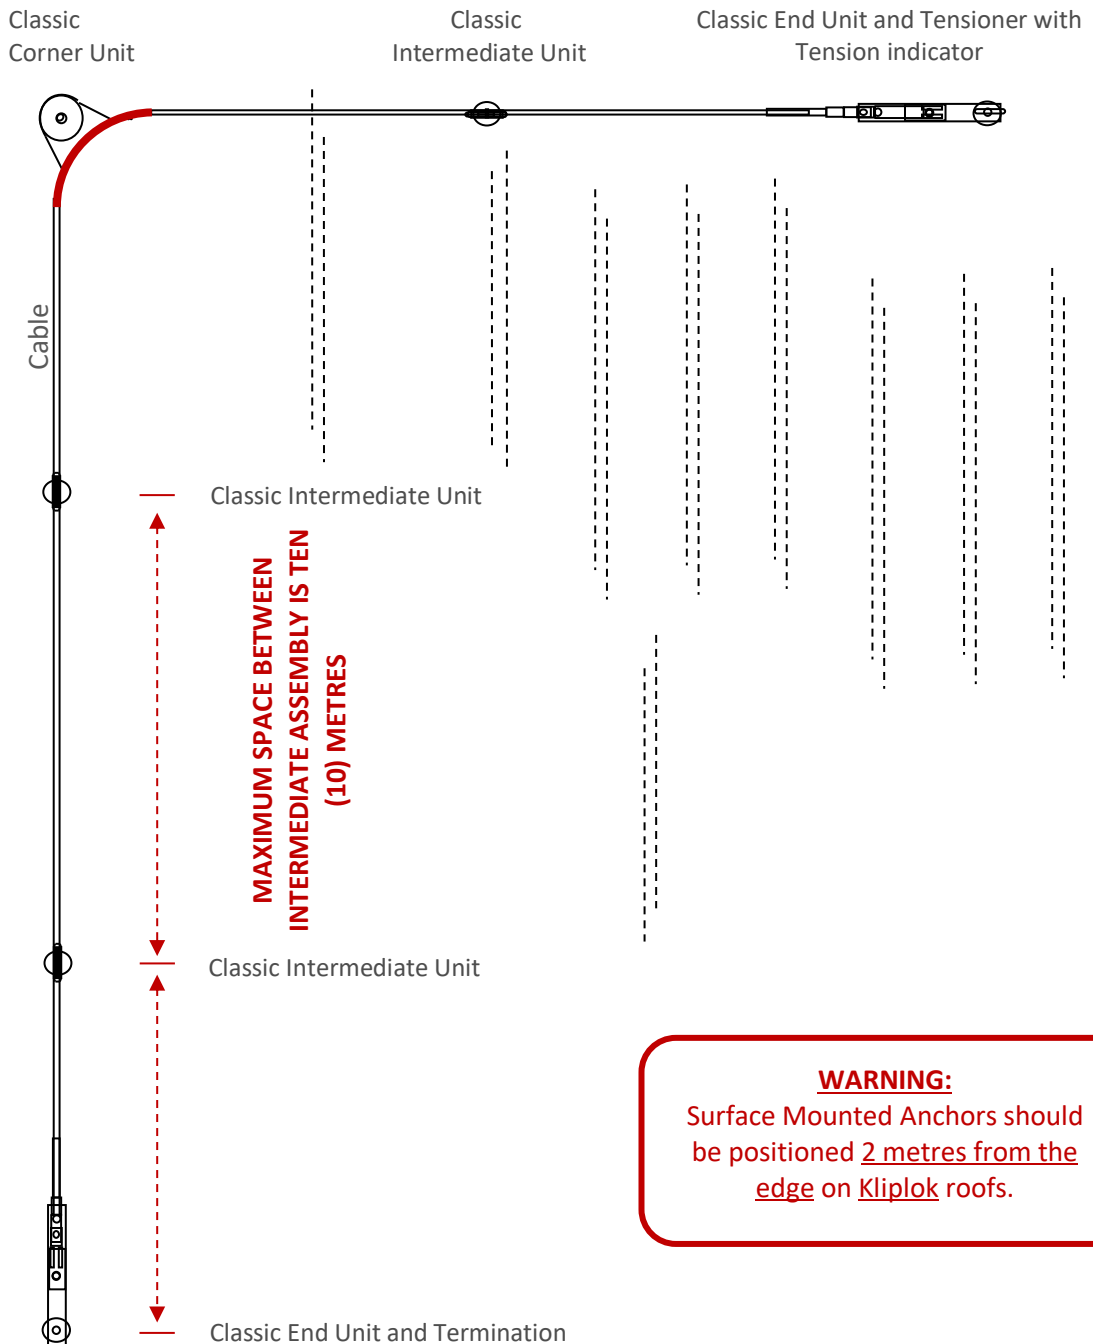

**SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.**

Version 08.17



*SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.*

**PRODUCT SHEET**

## COPYRIGHT TERMS AND CONDITIONS

Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

### Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@heightsafety.com.au](mailto:ip@heightsafety.com.au) and quote the product code.

