



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

CLASSIC LIFELINE

Surface Mounted INTERMEDIATE Anchor | Product Code: STAT.ASURF001



- ☒ Energy absorbing lifeline INTERMEDIATE anchor point.
- ☒ Suits a multitude of roof profiles with pitches no greater than 25 degrees.
- ☒ Constructed of 316 stainless steel and marine grade aluminium.
- ☒ Intended for use with 8mm stainless steel cables.
- ☒ Equipped with an engineered energy absorbing region to minimise loads on users and structures in the event of a fall.
- ☒ Install using (10) ten x gesipa bulbrite rivets, rv6605-9-6w (drill size 7.8-8.2mm, 27.7mm length, 1.0-9.5mm grip range, aluminium).
- ☒ Complies with AS/NZS 1891.2.
- ☒ Advance plate can be purchased in stainless steel, contact SafetyLink for pricing.

What am I used for?

A height safety system anchor point designed to be mounted on the surface of a metal roof profile as part of a permanent horizontal lifeline system, to limit lifeline span distances to under ten (10) metres. Fitted where it is difficult to access the underside of the roof.

SafetyLink® Pty Ltd horizontal lifeline system has been designed with the same tapered principle as the SafetyLink Energy Absorbing Eyebolt. This feature ensures all End, Intermediate and Corner Anchors have the same energy absorbing capabilities, consequently incorporating the line energy absorbers into the system.

In addition to our energy absorbing tapered design we have a SafetyLink® S-Bend included with our end anchors. When arresting a fall the S-Bend absorbs energy while straightening out, and still retaining the strength in the line.

This simplistic approach has been developed to ensure our systems are installed with all the necessary energy absorbing components regardless of length. The building or structure for the anchorages should be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

- ⚠ **MAXIMUM USER PER SYSTEM IS FOUR (4).**
- ⚠ **MAXIMUM PERSON PER SPAN IS TWO (2).**
- ⚠ **SEE SYSTEM INFORMATION FOR SITE SPECIFIC USE.**

PRODUCT COMPONENTS	QUANTITY
Intermediate T-Bolt: 316 Stainless Steel	1
Locking Hex Nut	1
Classic SurfaceLink Plate: Marine Grade Aluminium + Foam barrier tape	1
Washer: 70mm O.D. Black Plastic	1
Washer: 50mm O.D. 316 Stainless Steel	1
Nut: 16mm 316 Stainless Steel	1

Version 08.17




SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

POSITIONING LAYOUT

This is a guide only

All working at heights safety procedures must be complied with when installing SafetyLink height safety systems. For more information refer to your state or territories current legislation, regulations, policies and codes of practices. Horizontal height safety lifelines must only be installed and used by competent people with relevant current height safety qualifications.

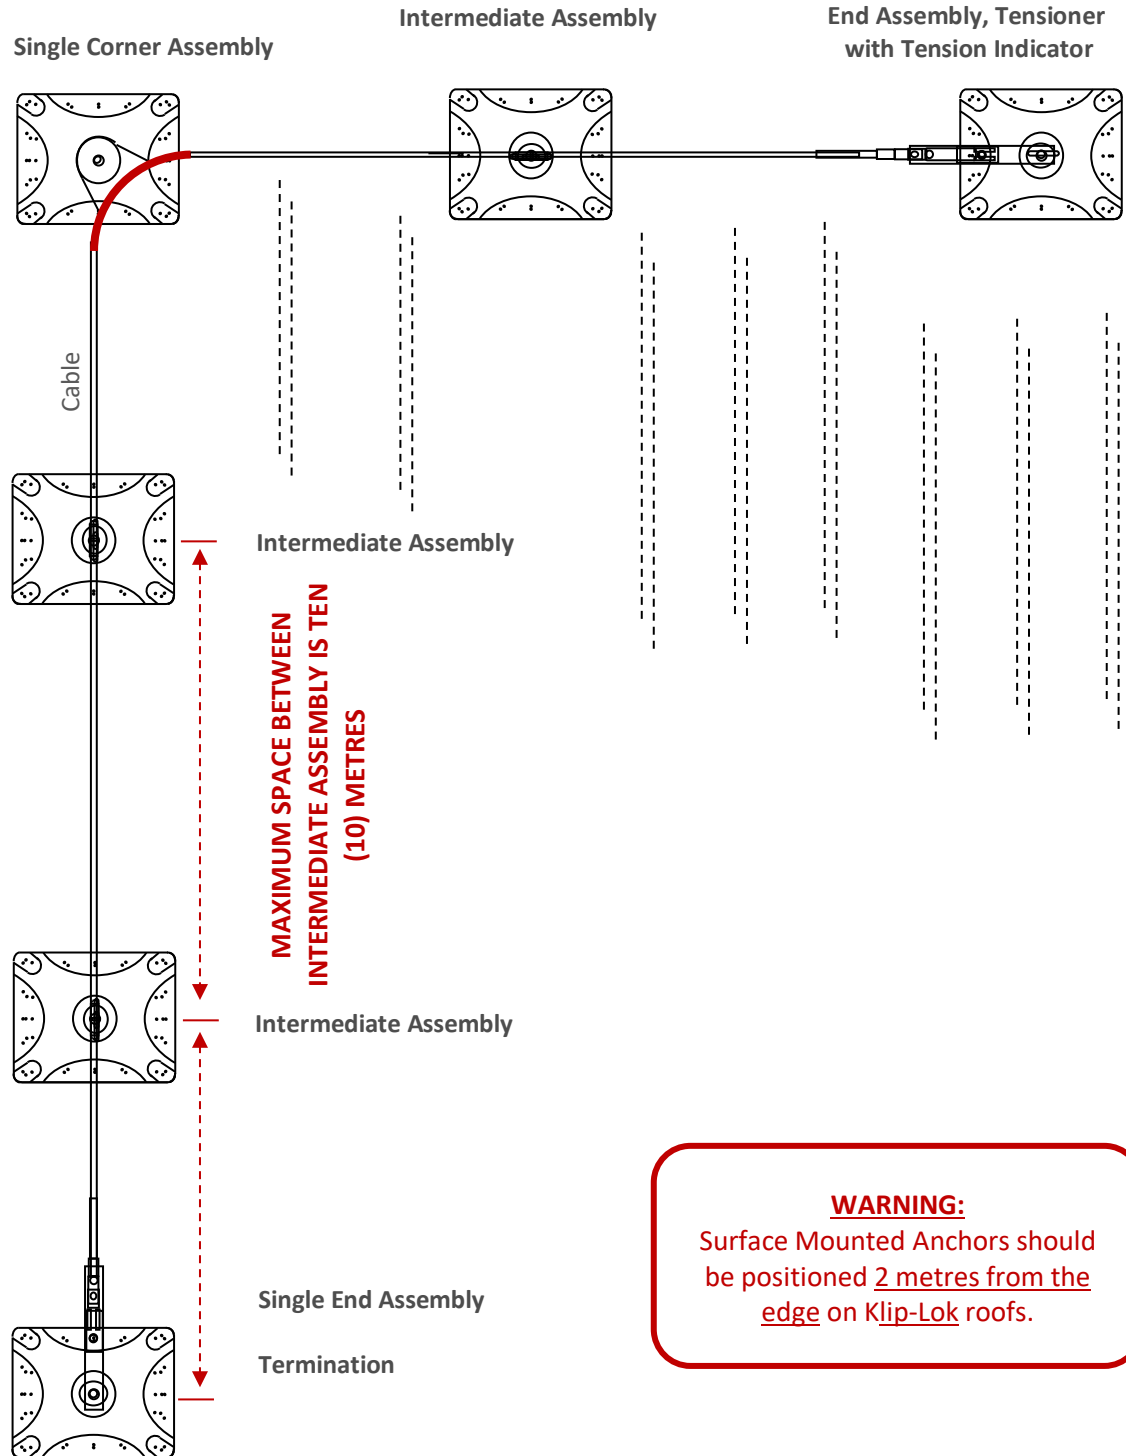

SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.

Version 08.17



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

COPYRIGHT TERMS AND CONDITIONS

Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on ip@heightsafety.com.au and quote the product code.

