


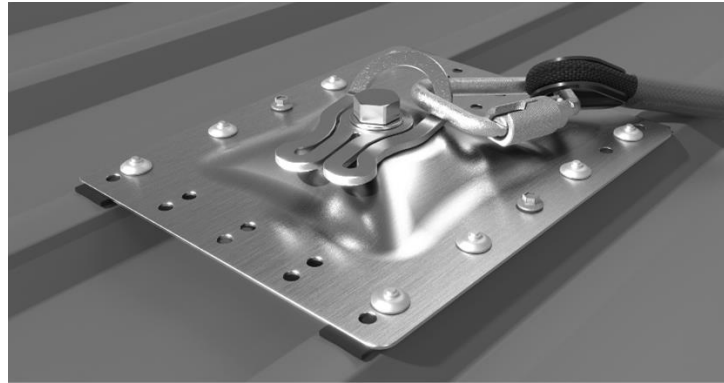

- SurfaceLink **ABSEILING ANCHOR** suits a multitude of roof profiles.
- Needs to be secured with 8x 8mm Rivets and 2x Hex Head Screws.
- The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

STANDARDS - Complies with AS/NZS 1891.4 and AS/NZS 5532-2013.

IMPORTANT NOTICE: Size 14.10x80mm All-Thread Hex Head Screws are supplied but if they don't penetrate the batten by a minimum of 35mm, longer screws need to be used.

WHAT AM I USED FOR? An anchor point designed for use on metal roof sheet profiles where access to timber is difficult. Adjustable design to suit different roof profiles.

COMPLETE UNIT - PRODUCT CODE: HSURFABM001+FIXINGS		Weight: 1.617kg	
Product Parts	Description	Qty	Material
HSURFABM001.01	Swivel Anchor	1	316 SS
HSURFABM001.02	Swivel Anchor Bushing	1	316 SS
HSURFABM001.03	Swivel Anchor Sticker	1	316 SS
BOLT-M16x35mm-SS	Bolt: M16x35mm Set Screw	1	316 SS
ADV-PLATE-SS-305-M	SurfaceLink Plate: 305mm (Precut Holes)	1	316 SS
WASHER 70od_SS	Washer: 70mm OD	1	316 SS
WASHER M16_SPRING_316	Spring Washer: M16	1	316 SS
NUT M16_316	Nut: M16	1	316 SS
FOAM-TAPE 30cm	Adhesive single sided foam tape	2	Foam
Rivet_8mm(27.7)	Aluminium 8mm Tri-fold Rivets	10	Aluminium
SCREW 14.10x80mm	14.10x80mm All-Thread Hex Head Screw – Metal Tip	2	Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-7903 Version: 3.0

