



HORIZONTAL LIFELINE - FrogLine Surface Mounted Anchors (Brownbuilt)

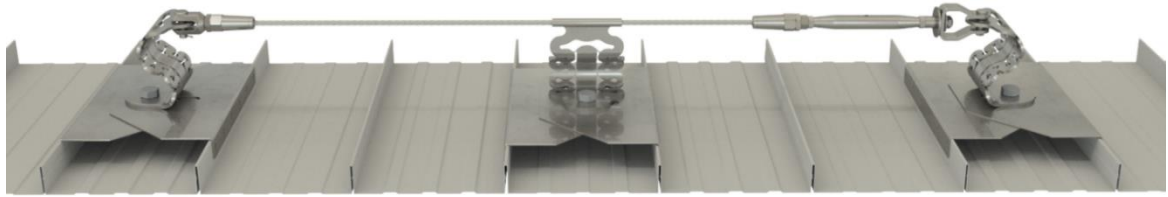

- ▲ A height safety lifeline system to be mounted on the surface of a longline/brownbuilt metal roof profile.
- ▲ Equipped with an engineered energy absorbing region to minimise loads on users and structures in the event of a fall.
- ▲ Continuous connection with 8mm stainless steel cable, utilising the Frogline Shuttle System, upto four users per system, two users per span.
- ▲ Install SafetyLink horizontal lifeline systems on roof pitches no greater than 15 degrees and across roof pitches no greater than 25 degrees.

STANDARDS: The FrogLine has been tested and manufactured in accordance with AS/NZS 1891.2, ANSI Z359.6-2009, EN 795:2012, CEN/TS 16415:2013 and OSHA 1926.502.

COMPLETE UNIT	ORDER CODE	QTY	WEIGHT (kg)
END	STAT. FROGSBB002+FIXINGS	1	2.509
CORNER	STAT. FROGSBB003+FIXINGS	1	2.658
INTERMEDIATE	STAT. FROGSBB001+FIXINGS	1	2.505
INTERMEDIATE EXTENDED	STAT. FROGSBB008+FIXINGS	1	2.640

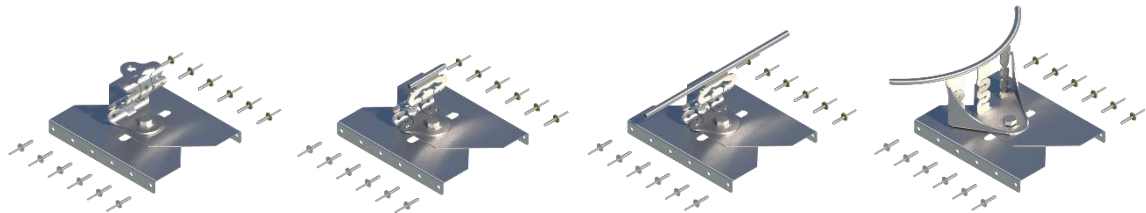

PRODUCT PARTS	DESCRIPTION	MATERIALS	QTY
FROGLINE END	FrogLine Base End	316SS	1
FROGLINE CNR	FrogLine Base	316SS	1
FROGLINE INT	FrogLine Base Intermediate	316SS	1
FROGLINE INT_EXT	FrogLine Base Intermediate Extended	316SS	1
BOLT-M16x35mm-SS	Bolt: M16 x 35mm	316SS	1
SURF-SIDEPLATE-BB	SurfaceLink Side Plate BENT+foam	316SS	2
WASHER 70od-SS	Washer: 70mm O.D.	316SS	1
WASHER M16_SPRING	Spring Washer: M16	316SS	1
NUT M16	Nut: M16	316SS	1
Rivet_8mm(34)	Rivets 7.7 x 34.0 length, 6.4-15.9 Grip (YELLOW SEAL)	Alum	12

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-854 Version: 6.0

